


NOTICE TO MARINERS No 10-2026

Nigg Energy Park – Berth 5 & 6 Seabed Reinstatement Works

Chart - BA1889 Cromarty Firth. Cromarty Bank to Invergordon
BA1077 Approaches to Cromarty Firth and Inverness Firth

Mariners are advised that repair works will commence on the seabed around berths 5 & 6 at Nigg Energy Park (location circled in red on the below chartlet) on or about 1 April 2026.

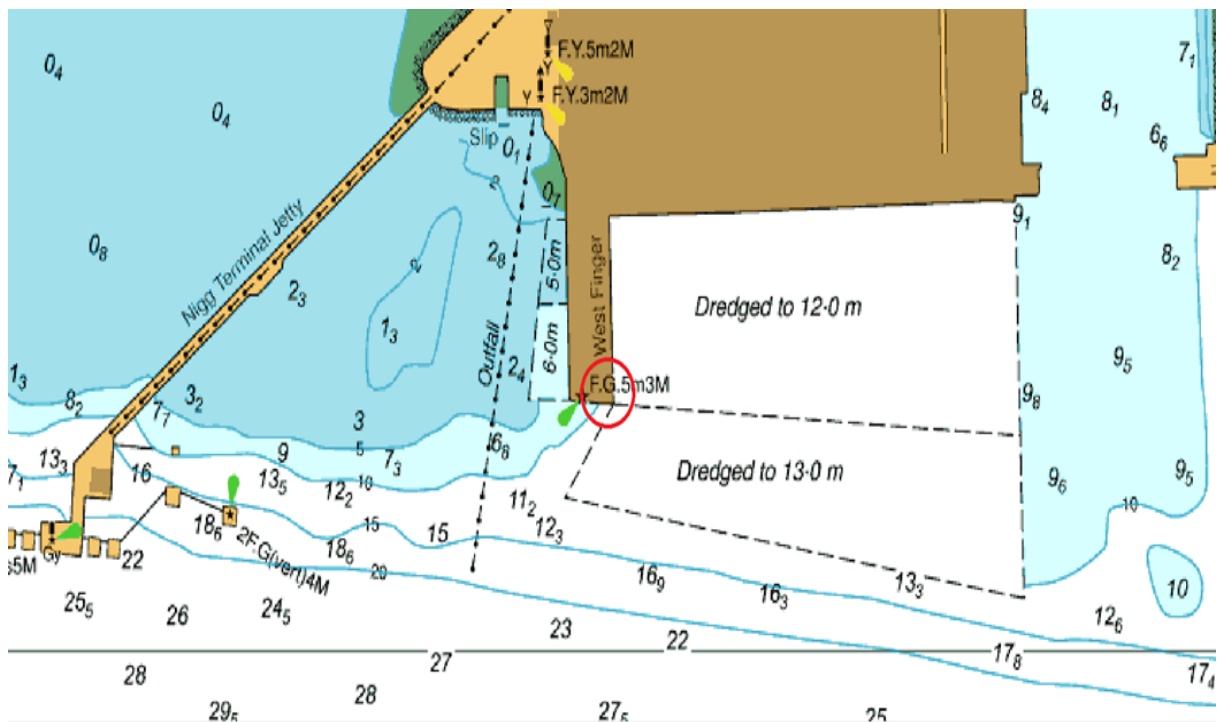

The works will consist of a spud leg barge together with a long reach excavator to lift rock armour stone from the quayside and place on the seabed to the seaward side of the existing quay wall on the southern and eastern faces of the southeast corner of the west finger quay. The aim of the works is to reinstate the seabed to -12.0mCD, this level is to extend a minimum of 4.5m from the quay wall after which the stone is to be placed at a slope until reaching the existing seabed level.

On completion a bathymetric survey will be undertaken to confirm the works have been completed as per design, this will be repeated until such times that the design requirements have been fulfilled.



Mariners are instructed to exercise caution, to keep clear, and pass at minimum speed to reduce wake effects, when navigating in proximity to the area.

For further information, please contact Port Radio on VHF Ch 11.

Calum Slater
General Manager / Port Manager (Harbour Master)

30 March 2026